

Research Article

On Critical Buckling Loads of Columns under End Load Dependent on Direction

Musa Başbük,¹ Aytekin Eryılmaz,¹ and M. Tarık Atay²

¹ Department of Mathematics, Nevşehir Hacı Bektaş Veli University, 50300 Nevşehir, Turkey

² Department of Mechanical Engineering, Abdullah Gül University, 38039 Kayseri, Turkey

Correspondence should be addressed to Aytekin Eryılmaz; eryilmazaytekin@gmail.com

Received 30 April 2014; Revised 18 September 2014; Accepted 29 September 2014; Published 29 October 2014

Academic Editor: George Fikioris

Copyright © 2014 Musa Başbük et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Most of the phenomena of various fields of applied sciences are nonlinear problems. Recently, various types of analytical approximate solution techniques were introduced and successfully applied to the nonlinear differential equations. One of the aforementioned techniques is the Homotopy analysis method (HAM). In this study, we applied HAM to find critical buckling load of a column under end load dependent on direction. We obtained the critical buckling loads and compared them with the exact analytic solutions in the literature.

1. Introduction

Nonlinear differential equations arise in a wide range of scientific studies from physics to biology, from engineering to economics. However it is not possible to find an exact analytical solution for the nonlinear equations every time. Analytical approximate solution techniques such as perturbation and nonperturbative techniques have been used to solve these nonlinear equations in recent years. These techniques have been widely applied in many fields of engineering and science. Neither perturbation techniques nor nonperturbation techniques ensure the convergence of solution series and adjust or control the convergence region and rate of approximation series.

On the other hand an analytic approach, the homotopy analysis method (HAM) which is proposed by Liao, provides a convenient way to adjust and control the convergence region and the rate of approximation series by the auxiliary parameter \hbar and auxiliary function $H(t)$ [1, 2]. HAM has been applied successfully to obtain the series solution of various types of linear and nonlinear differential equations such as the viscous flows of non-Newtonian fluids [3–13], the KdV-type equations [14–16], nanoboundary layer flows [17], nonlinear heat transfer [18, 19], finance problems [20, 21], Riemann

problems related to nonlinear shallow water equations [22], projectile motion [23], Glauert-jet flow [24], nonlinear water waves [25], ground water flows [26], Burgers-Huxley equation [27], time-dependent Emden-Fowler type equations [28], differential difference equation [29], difference equation [30], Laplace equation with Dirichlet and Neumann boundary conditions [31], and thermal-hydraulic networks [32].

One of the fields that nonlinear differential equations arise is the stability analysis of columns in mechanical engineering. Many researchers applied analytical approximate solution techniques to the stability analysis of various types of columns with different end conditions. Atay and Coşkun investigated the elastic stability of a homogenous and nonhomogenous Euler beam [33–39]. Pinarbasi investigated the buckling analysis of nonuniform columns with elastic end restraints [40]. Huang and Luo determined critical buckling loads of beams with arbitrarily axial inhomogeneity [41]. Recently, Yuan and Wang [42] solved the postbuckling differential equations of extensible beam-columns with six different cases. Eryılmaz and Atay investigated the buckling loads of Euler column with a continuous elastic restraint by using HAM [43].

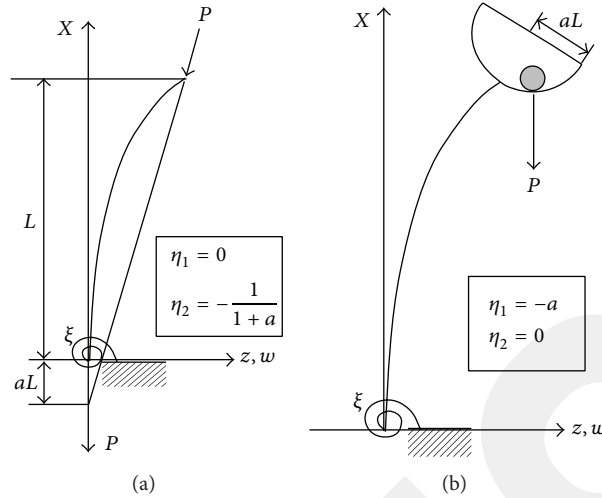


FIGURE 1: Buckling of various types of columns [45].

TABLE 1: Stability criteria for the various columns given in Figure 1.

ξ	η_1	η_2	Stability criteria
∞	0	$-\frac{1}{1+a}$	$a\sqrt{\alpha} + \tan \sqrt{\alpha} = 0$
∞	$-a$	0	$1 - a\sqrt{\alpha} \tan \sqrt{\alpha} = 0$

In this study we apply HAM to find the critical buckling load of a column under end load dependent on direction.

2. Column under End Load Dependent on Direction

Consider a fixed-free, uniform homogeneous column of flexural rigidity EI , length L which is subjected to a load P that is dependent on the deflection and slope of the free end of the buckled column as shown in Figure 1 [44].

The governing buckling equation is given by [45]

$$\frac{d^4 w}{dx^4} + \alpha \frac{d^2 w}{dx^2} = 0, \quad \alpha = \frac{PL^2}{EI}, \quad (1)$$

subject to the boundary conditions:

$$w(0) = 0,$$

$$\left[\xi_0 \frac{dw}{dx} - \frac{d^2 w}{dx^2} \right] \Big|_{x=0} = 0, \quad (2)$$

$$\left[\alpha \eta_1 \frac{dw}{dx} + \frac{d^2 w}{dx^2} \right] \Big|_{x=1} = 0,$$

$$\alpha \eta_2 w(1) + \left[\frac{d^3 w}{dx^3} + \alpha \frac{dw}{dx} \right] \Big|_{x=1} = 0,$$

where η_1 and η_2 are nondimensional parameters defined in Figure 1. The general solution of (1) is

$$w = c_1 \sin \sqrt{\alpha} x + c_2 \cos \sqrt{\alpha} x + c_3 x + c_4. \quad (3)$$

Substituting the general solution into the aforementioned boundary conditions, the stability criteria take the following form [45]:

$$2 + \left[\frac{1}{\alpha \eta_1} + \frac{1}{\xi} + \frac{1}{\eta_1 \eta_2 \xi} + \frac{1}{\eta_1 \xi} - \frac{1}{\eta_2} - 1 \right] \sqrt{\alpha} \sin \sqrt{\alpha} + \left[2 - \alpha \left(\frac{1}{\eta_2} + 1 \right) \left(\frac{1}{\alpha \eta_1} + \frac{1}{\xi} \right) \right] \cos \sqrt{\alpha} = 0. \quad (4)$$

The stability criteria for the columns in Figure 1 are given in Table 1.

3. Basic Idea of Homotopy Analysis Method (HAM)

Liao introduced the homotopy analysis method (HAM) in [1, 2]. To demonstrate the homotopy analysis method, let us consider the following differential equation:

$$N[w(x)] = 0, \quad (5)$$

where N is a nonlinear operator, x denotes the independent variable, and $w(x)$ is an unknown function. Liao [2] constructs the so-called zero order deformation equation as follows:

$$(1 - q)L[\phi(x; q) - w_0(x)] = q\hbar H(x)N[\phi(x; q)], \quad (6)$$

where $q \in [0, 1]$ is the embedding parameter, \hbar is a nonzero auxiliary linear parameter, $H(x)$ is nonzero auxiliary function, $w_0(x)$ is the initial guess of $w(x)$, L is an auxiliary linear operator, and $\phi(x; q)$ is an unknown function. As q increases from 0 to 1, $\phi(x; q)$ varies from the initial guess $w_0(x)$ to the exact solution $w(x)$. By expanding $\phi(x; q)$ in a Taylor's series with respect to q , one has

$$\phi(x; q) = w_0(x) + \sum_{m=1}^{\infty} w_m(x) q^m, \quad (7)$$

where

$$w_m(x) = \frac{1}{m!} \left. \frac{\partial^m N[\phi(x; q)]}{\partial q^m} \right|_{q=0}. \tag{8}$$

If the initial guess, auxiliary linear operator, auxiliary parameter, and auxiliary function are properly chosen the series (8) converges at $q = 1$; then we have

$$w(x) = w_0(x) + \sum_{m=1}^{\infty} w_m(x). \tag{9}$$

Let us define the vector

$$\vec{w}_m(x) = \{w_1(x), w_2(x), \dots, w_n(x)\}. \tag{10}$$

Differentiating equation (6) m -times with respect to q and then setting $q = 0$ and finally dividing by $m!$, Liao has the so-called m th order deformation equation:

$$L[w_m(x) - \chi_m w_{m-1}(x)] = \hbar H(x) R_m[\vec{w}_{m-1}(x)], \tag{11}$$

where

$$R_m[\vec{w}_{m-1}(x)] = \frac{1}{(m-1)!} \left. \frac{\partial^{m-1} N[\phi(x; q)]}{\partial q^{m-1}} \right|_{q=0}, \tag{12}$$

$$\chi_m = \begin{cases} 0, & m \leq 1, \\ 1, & m > 1. \end{cases} \tag{13}$$

In order to obey both of the rule of solution expression and the rule of the coefficient ergodicity [2], the corresponding auxiliary function is determined by $H(x) = 1$. For any given operator N , the term $R_m[\vec{w}_{m-1}(x)]$ can be easily expressed by (12). So we can obtain $w_1(x), w_2(x), \dots$ by means of solving the linear high order deformation equation (11). The m th order approximation of $W(x)$ is given by

$$w(x) \cong W(x) = \sum_{m=0}^n w_m(x). \tag{14}$$

The approximate solution consists of \hbar , which is a cornerstone of the HAM in determining convergence of series solution rapidly. We may adjust and control the convergence region and rate of the solution series (14) by means of the auxiliary parameter \hbar . To obtain valid region of \hbar we first plot the so-called \hbar -curves of $W(x, \hbar)$. The valid region of \hbar is the interval, which corresponds to the line segments nearly parallel to the horizontal axis.

Theorem 1 (Convergence Theorem [2]). *As long as the series (9) converges to $w(x)$, where $w_m(x)$ is governed by the high order deformation equation (11) under the definitions (12) and (13), it must be the exact solution of (1) subject to the boundary conditions (2).*

For the proof see [2].

4. HAM Formulation of the Problem

To solve (1) by means of homotopy analysis method, we define the nonlinear operator $N[\phi(x; q)]$ and the auxiliary linear operator L as follows:

$$N[\phi(x; q)] = \phi^{(iv)}(x; q) + \alpha \phi''(x; q), \tag{15}$$

$$L[\phi(x; q)] = \phi^{(iv)}(x; q).$$

Using the embedding parameter $q \in [0, 1]$, we construct a family of equations:

$$(1 - q)L[\phi(x; q) - w_0(x)] = q\hbar H(x)N[\phi(x; q)]. \tag{16}$$

The high order deformation equation is as follows:

$$L[w_m(x) - \chi_m w_0(x)] = \hbar H(x)R_m[\vec{w}_{m-1}(x)], \tag{17}$$

where

$$R_m[\vec{w}_{m-1}(x)] = w_{m-1}^{(iv)}(x) + \alpha w_{m-1}''(x). \tag{18}$$

By using (17) and (18), choosing $H(x) = 1$, the high order deformation equation (17) yields the equation

$$\begin{aligned} w_m(x) &= \chi_m w_{m-1}(x) + \hbar \\ &\times \int_0^x \int_0^\tau \int_0^\zeta \int_0^\psi [w_{m-1}^{(iv)}(\xi) + \alpha w_{m-1}''(\xi)] d\xi d\psi d\zeta d\tau. \end{aligned} \tag{19}$$

Starting with an initial approximation $w_0(x)$, we successively obtain $w_i(x)$, $i = 1, 2, 3, \dots$, by (19). The solution is of the form

$$w(x) = w_0(x) + \sum_{m=1}^{\infty} w_m(x). \tag{20}$$

Since the governing equation (1) is a fourth order differential equation we choose the initial approximation as $w_0(x) = ax^3 + bx^2 + cx + d$ a polynomial of third degree with four unknown coefficients a, b, c, d . Then we obtained $w_i(x)$, $i = 1, 2, 3, \dots$, by using the m th order deformation equation (19) as follows:

$$\begin{aligned} w_1(x) &= \frac{1}{12}bx^4\alpha\hbar + \frac{1}{20}ax^5\alpha\hbar, \\ w_2(x) &= \frac{1}{12}bx^4\alpha\hbar + \frac{1}{20}ax^5\alpha\hbar + \frac{1}{12}bx^4\alpha\hbar^2 \\ &\quad + \frac{1}{20}ax^5\alpha\hbar^2 + \frac{1}{360}bx^6\alpha^2\hbar^2 + \frac{1}{840}ax^7\alpha^2\hbar^2, \\ w_3(x) &= \frac{1}{12}bx^4\alpha\hbar + \frac{1}{20}ax^5\alpha\hbar + \frac{1}{6}bx^4\alpha\hbar^2 \\ &\quad + \frac{1}{10}ax^5\alpha\hbar^2 + \frac{1}{180}bx^6\alpha^2\hbar^2 + \frac{1}{420}ax^7\alpha^2\hbar^2 \end{aligned}$$

$$\begin{aligned}
 & + \frac{1}{12}bx^4\alpha\hbar^3 + \frac{1}{20}ax^5\alpha\hbar^3 + \frac{1}{180}bx^6\alpha^2\hbar^3 \\
 & + \frac{1}{420}ax^7\alpha^2\hbar^3 + \frac{bx^8\alpha^3\hbar^3}{20160} + \frac{ax^9\alpha^3\hbar^3}{60480}, \\
 w_4(x) = & \frac{1}{12}bx^4\alpha\hbar + \frac{1}{20}ax^5\alpha\hbar + \frac{1}{4}bx^4\alpha\hbar^2 \\
 & + \frac{3}{20}ax^5\alpha\hbar^2 + \frac{1}{120}bx^6\alpha^2\hbar^2 + \frac{1}{280}ax^7\alpha^2\hbar^2 \\
 & + \frac{1}{4}bx^4\alpha\hbar^3 + \frac{3}{20}ax^5\alpha\hbar^3 + \frac{1}{60}bx^6\alpha^2\hbar^3 \\
 & + \frac{1}{140}ax^7\alpha^2\hbar^3 + \frac{bx^8\alpha^3\hbar^3}{6720} + \frac{ax^9\alpha^3\hbar^3}{20160} \\
 & + \frac{1}{12}bx^4\alpha\hbar^4 + \frac{1}{20}ax^5\alpha\hbar^4 + \frac{1}{120}bx^6\alpha^2\hbar^4 \\
 & + \frac{1}{280}ax^7\alpha^2\hbar^4 + \frac{bx^8\alpha^3\hbar^4}{6720} + \frac{ax^9\alpha^3\hbar^4}{20160} \\
 & + \frac{bx^{10}\alpha^4\hbar^4}{1814400} + \frac{ax^{11}\alpha^4\hbar^4}{6652800}, \\
 & \vdots \\
 \end{aligned} \tag{21}$$

Ten iterations are conducted and we get

$$\begin{aligned}
 W_{10}(x, \hbar) = & \sum_{n=0}^{10} w_n(x) = w_0(x) \\
 & + w_1(x) + w_2(x) + \dots + w_{10}(x).
 \end{aligned} \tag{22}$$

By substituting (22) into the boundary conditions, we obtained four homogeneous equations. By representing the coefficient matrix of these equations with $[W(\alpha, \xi, \eta_1, \eta_2, \hbar)]$ we get the following equation:

$$[W(\alpha, \xi, \eta_1, \eta_2, \hbar)] [a \ b \ c \ d]^T = [0 \ 0 \ 0 \ 0]^T, \tag{23}$$

where $a, b, c,$ and d are the unknown constants of initial approximation $w_0(x)$ and T denotes the transpose of the matrix. For nontrivial solution the determinant of the coefficient matrix $[W(\alpha, \xi, \eta_1, \eta_2, \hbar)]$ must vanish. Thus the problem takes the following form:

$$\text{Det} [W(\alpha, \xi, \eta_1, \eta_2, \hbar)] = 0. \tag{24}$$

The smallest positive real root of (24) is the critical buckling load. We defined the function $U(\alpha, \xi_0, \xi_1, \zeta, \hbar)$ as follows:

$$U(\alpha, \xi, \eta_1, \eta_2, \hbar) = \text{Det} [W(\alpha, \xi, \eta_1, \eta_2, \hbar)], \tag{25}$$

and then we plot the \hbar -curves of the $U(\alpha, \xi, \eta_1, \eta_2, \hbar)$ in order to find convergence region of the \hbar .

The \hbar curves of $U(\alpha, \xi, \eta_1, \eta_2, \hbar)$ and $U'(\alpha, \xi, \eta_1, \eta_2, \hbar)$ are given in Figure 2. The valid region of \hbar is the region which corresponds to the line segments nearly parallel to the horizontal axis. The valid region of \hbar is about $-1.5 < \hbar < -0.4$.

Finally we obtained the critical buckling loads from (24) for $\hbar = -0.99$. We compared the exact solutions given by Wang et al. [45] and HAM solutions in Tables 2 and 3.

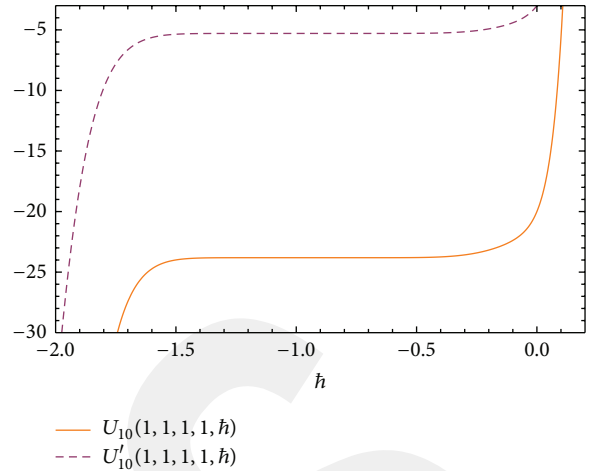


FIGURE 2: The \hbar curves of $U(\alpha, \xi, \eta_1, \eta_2, \hbar)$ and $U'(\alpha, \xi, \eta_1, \eta_2, \hbar)$.

TABLE 2: Comparison of exact and HAM solutions of critical buckling loads for the column in Figure 1(a) with $\eta_1 = 0, \eta_2 = -1/(1 + a),$ and $\xi = \infty$.

a	Critical load $\sqrt{\alpha}$	
	Exact solution [45]	HAM solution
0.1	2.86277	2.86277
0.2	2.65366	2.65366
0.3	2.49840	2.49840
0.4	2.38064	2.38064
0.5	2.28893	2.28893
0.6	2.21571	2.21571
0.7	2.15598	2.15598
0.8	2.10638	2.10638
0.9	2.06453	2.06453
1	2.02876	2.02876

TABLE 3: Comparison of exact and HAM solutions of critical buckling loads for the column in Figure 1(b) with $\eta_1 = -a, \eta_2 = 0,$ and $\xi = \infty$.

a	Critical load $\sqrt{\alpha}$	
	Exact solution [45]	HAM solution
0.1	1.428870	1.428870
0.2	1.313840	1.313840
0.3	1.219950	1.219950
0.4	1.142230	1.142230
0.5	1.076870	1.076870
0.6	1.021110	1.021110
0.7	0.972911	0.972911
0.8	0.930757	0.930757
0.9	0.893519	0.893519
1	0.860334	0.860334

5. Conclusions

In this work, a reliable algorithm based on the HAM to solve the critical buckling load of Euler column with elastic end

restraints is presented. Two cases are given to illustrate the validity and accuracy of this procedure. The series solutions of (1) by HAM contain the auxiliary parameter \hbar . In general, by means of the so-called \hbar -curve, it is straightforward to choose a proper value of \hbar which ensures that the series solution is convergent. Figure 2 shows the \hbar -curves obtained from the m th order HAM approximation solutions. In Tables 2 and 3 the critical buckling loads for various values of ξ_0 , ξ_1 , ζ obtained by HAM are tabulated. The HAM solutions and the exact solutions in [45] are compared. As a result HAM is an efficient, powerful and accurate tool for buckling loads of columns.

Conflict of Interests

The authors declare that there is no conflict of interests regarding the publication of this paper.

References

- [1] S. J. Liao, *The proposed homotopy analysis technique for the solution of nonlinear problems [Ph.D. thesis]*, Shanghai Jiao Tong University, 1992.
- [2] S. J. Liao, *Beyond Perturbation: Introduction to the Homotopy Analysis Method*, Chapman & Hall, Boca Raton, Fla, USA, 2003.
- [3] T. Hayat, T. Javed, and M. Sajid, "Analytic solution for rotating flow and heat transfer analysis of a third-grade fluid," *Acta Mechanica*, vol. 191, no. 3-4, pp. 219–229, 2007.
- [4] T. Hayat, S. B. Khan, M. Sajid, and S. Asghar, "Rotating flow of a third grade fluid in a porous space with Hall current," *Nonlinear Dynamics*, vol. 49, no. 1-2, pp. 83–91, 2007.
- [5] T. Hayat and M. Sajid, "On analytic solution for thin film flow of a fourth grade fluid down a vertical cylinder," *Physics Letters, Section A: General, Atomic and Solid State Physics*, vol. 361, no. 4-5, pp. 316–322, 2007.
- [6] T. Hayat and M. Sajid, "Analytic solution for axisymmetric flow and heat transfer of a second grade fluid past a stretching sheet," *International Journal of Heat and Mass Transfer*, vol. 50, no. 1-2, pp. 75–84, 2007.
- [7] T. Hayat, Z. Abbas, M. Sajid, and S. Asghar, "The influence of thermal radiation on MHD flow of a second grade fluid," *International Journal of Heat and Mass Transfer*, vol. 50, no. 5-6, pp. 931–941, 2007.
- [8] T. Hayat and M. Sajid, "Homotopy analysis of MHD boundary layer flow of an upper-convected Maxwell fluid," *International Journal of Engineering Science*, vol. 45, no. 2-8, pp. 393–401, 2007.
- [9] T. Hayat, N. Ahmed, M. Sajid, and S. Asghar, "On the MHD flow of a second grade fluid in a porous channel," *Computers & Mathematics with Applications*, vol. 54, no. 3, pp. 407–414, 2007.
- [10] T. Hayat, M. Khan, and M. Ayub, "The effect of the slip condition on flows of an Oldroyd 6-constant fluid," *Journal of Computational and Applied Mathematics*, vol. 202, no. 2, pp. 402–413, 2007.
- [11] M. Sajid, A. M. Siddiqui, and T. Hayat, "Wire coating analysis using MHD Oldroyd 8-constant fluid," *International Journal of Engineering Science*, vol. 45, no. 2-8, pp. 381–392, 2007.
- [12] M. Sajid, T. Hayat, and S. Asghar, "Non-similar analytic solution for MHD flow and heat transfer in a third-order fluid over a stretching sheet," *International Journal of Heat and Mass Transfer*, vol. 50, no. 9-10, pp. 1723–1736, 2007.
- [13] M. Sajid, T. Hayat, and S. Asghar, "Non-similar solution for the axisymmetric flow of a third-grade fluid over a radially stretching sheet," *Acta Mechanica*, vol. 189, no. 3-4, pp. 193–205, 2007.
- [14] S. Abbasbandy and F. S. Zakaria, "Soliton solutions for the fifth-order KdV equation with the homotopy analysis method," *Nonlinear Dynamics*, vol. 51, no. 1-2, pp. 83–87, 2008.
- [15] S. Abbasbandy, "The application of homotopy analysis method to solve a generalized Hirota-Satsuma coupled KdV equation," *Physics Letters, Section A: General, Atomic and Solid State Physics*, vol. 361, no. 6, pp. 478–483, 2007.
- [16] L. Song and H. Q. Zhang, "Application of homotopy analysis method to fractional KdV-Burgers-KURamoto equation," *Physics Letters A*, vol. 367, no. 1-2, pp. 88–94, 2007.
- [17] J. Cheng, S. Liao, R. N. Mohapatra, and K. Vajravelu, "Series solutions of nano boundary layer flows by means of the homotopy analysis method," *Journal of Mathematical Analysis and Applications*, vol. 343, no. 1, pp. 233–245, 2008.
- [18] S. Abbasbandy, "The application of homotopy analysis method to nonlinear equations arising in heat transfer," *Physics Letters A*, vol. 360, no. 1, pp. 109–113, 2006.
- [19] S. Abbasbandy, "Homotopy analysis method for heat radiation equations," *International Communications in Heat and Mass Transfer*, vol. 34, no. 3, pp. 380–387, 2007.
- [20] S.-P. Zhu, "An exact and explicit solution for the valuation of American put options," *Quantitative Finance*, vol. 6, no. 3, pp. 229–242, 2006.
- [21] S.-P. Zhu, "A closed-form analytical solution for the valuation of convertible bonds with constant dividend yield," *The ANZIAM Journal*, vol. 47, no. 4, pp. 477–494, 2006.
- [22] Y. Wu and K. F. Cheung, "Explicit solution to the exact Riemann problem and application in nonlinear shallow-water equations," *International Journal for Numerical Methods in Fluids*, vol. 57, no. 11, pp. 1649–1668, 2008.
- [23] K. Yabushita, M. Yamashita, and K. Tsuboi, "An analytic solution of projectile motion with the quadratic resistance law using the homotopy analysis method," *Journal of Physics A*, vol. 40, no. 29, pp. 8403–8416, 2007.
- [24] Y. Bouremel, "Explicit series solution for the Glauert-jet problem by means of the homotopy analysis method," *Communications in Nonlinear Science and Numerical Simulation*, vol. 12, no. 5, pp. 714–724, 2007.
- [25] L. Tao, H. Song, and S. Chakrabarti, "Nonlinear progressive waves in water of finite depth—an analytic approximation," *Coastal Engineering*, vol. 54, no. 11, pp. 825–834, 2007.
- [26] H. Song and L. Tao, "Homotopy analysis of 1D unsteady, nonlinear groundwater flow through porous media," *Journal of Coastal Research*, no. 50, pp. 292–295, 2007.
- [27] A. Molabahrani and F. Khani, "The homotopy analysis method to solve the Burgers-Huxley equation," *Nonlinear Analysis: Real World Applications*, vol. 10, no. 2, pp. 589–600, 2009.
- [28] A. S. Bataineh, M. S. M. Noorani, and I. Hashim, "Solutions of time-dependent Emden–Fowler type equations by homotopy analysis method," *Physics Letters A*, vol. 371, no. 1-2, pp. 72–82, 2007.
- [29] Z. Wang, L. Zou, and H. Zhang, "Applying homotopy analysis method for solving differential-difference equation," *Physics Letters A: General, Atomic and Solid State Physics*, vol. 369, no. 1-2, pp. 77–84, 2007.
- [30] M. Başbük and A. Eryılmaz, "The approximate solutions of first order difference equations with constant and variable

- coefficients,” *Sop Transactions On Applied Mathematics*, vol. 1, no. 2, pp. 1–10, 2014.
- [31] M. Inc, “On exact solution of Laplace equation with Dirichlet and Neumann boundary conditions by the homotopy analysis method,” *Physics Letters A*, vol. 365, no. 5–6, pp. 412–415, 2007.
- [32] W. H. Cai, *Nonlinear dynamics of thermal-hydraulic networks [Ph.D. thesis]*, University of Notre Dame, Notre Dame, Ind, USA, 2006.
- [33] M. T. Atay and S. B. Coşkun, “Elastic stability of Euler columns with a continuous elastic restraint using variational iteration method,” *Computers & Mathematics with Applications*, vol. 58, no. 11–12, pp. 2528–2534, 2009.
- [34] S. B. Coşkun and M. T. Atay, “Determination of critical buckling load for elastic columns of constant and variable cross-sections using variational iteration method,” *Computers & Mathematics with Applications*, vol. 58, no. 11–12, pp. 2260–2266, 2009.
- [35] M. T. Atay, “Determination of buckling loads of tilted buckled column with varying flexural rigidity using variational iteration method,” *International Journal of Nonlinear Sciences and Numerical Simulation*, vol. 11, no. 2, pp. 97–103, 2010.
- [36] F. Okay, M. T. Atay, and S. B. Coşkun, “Determination of buckling loads and mode shapes of a heavy vertical column under its own weight using the variational iteration method,” *International Journal of Nonlinear Sciences and Numerical Simulation*, vol. 11, no. 10, pp. 851–857, 2010.
- [37] S. B. Coşkun, “Determination of critical buckling loads for euler columns of variable flexural stiffness with a continuous elastic restraint using homotopy perturbation method,” *International Journal of Nonlinear Sciences and Numerical Simulation*, vol. 10, no. 2, pp. 191–197, 2009.
- [38] M. T. Atay, “Determination of critical buckling loads for variable stiffness euler columns using homotopy perturbation method,” *International Journal of Nonlinear Sciences and Numerical Simulation*, vol. 10, no. 2, pp. 199–206, 2009.
- [39] S. B. Coşkun, “Analysis of tilt-buckling of Euler columns with varying flexural stiffness using homotopy perturbation method,” *Mathematical Modelling and Analysis*, vol. 15, no. 3, pp. 275–286, 2010.
- [40] S. Pinarbasi, “Stability analysis of nonuniform rectangular beams using homotopy perturbation method,” *Mathematical Problems in Engineering*, vol. 2012, Article ID 197483, 18 pages, 2012.
- [41] Y. Huang and Q.-Z. Luo, “A simple method to determine the critical buckling loads for axially inhomogeneous beams with elastic restraint,” *Computers & Mathematics with Applications*, vol. 61, no. 9, pp. 2510–2517, 2011.
- [42] Z. Yuan and X. Wang, “Buckling and post-buckling analysis of extensive beam-columns by using the differential quadrature method,” *Computers & Mathematics with Applications*, vol. 62, no. 12, pp. 4499–4513, 2011.
- [43] A. Eryılmaz, M. T. Atay, S. B. Coşkun, and M. Başbüük, “Buckling of Euler columns with a continuous elastic restraint via homotopy analysis method,” *Journal of Applied Mathematics*, vol. 2013, Article ID 341063, 8 pages, 2013.
- [44] M. Zyczkowski, *Strength of Structural Elements*, PWN-Polish Scientific Publishers,, Warsaw, Poland, 1991.
- [45] C. M. Wang, C. Y. Wang, and J. N. Reddy, *Exact Solutions for Buckling of Structural Members*, CRC Press, Boca Raton, Fla, USA, 2005.